


Technical Manual

O-TERRACE


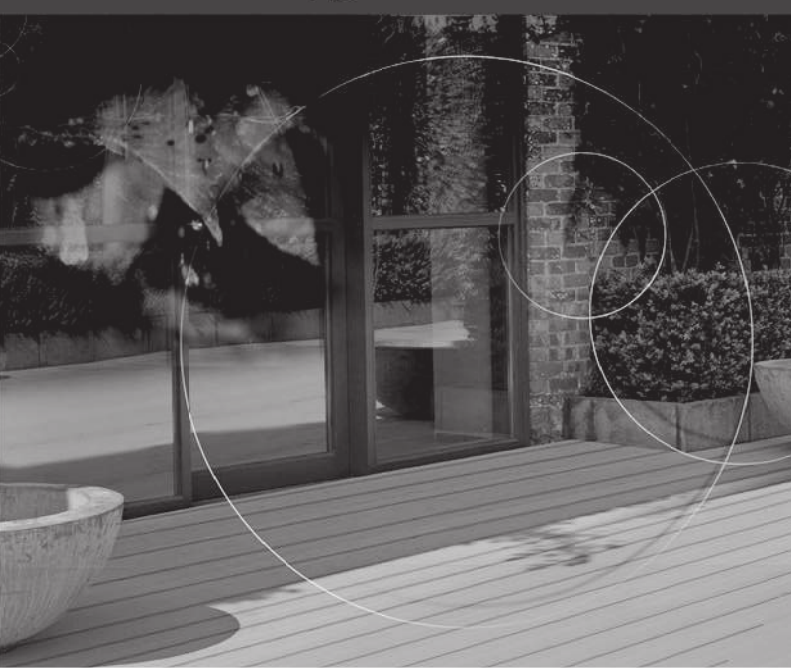


www.twinson-terrasplanken.nl

www.heering.eu

product van **HEERING**

2

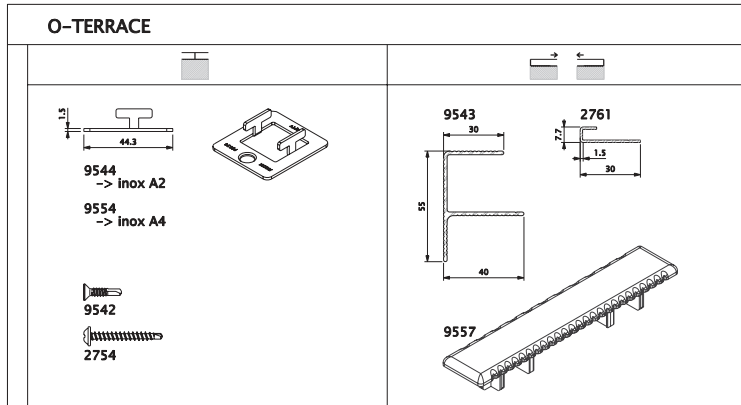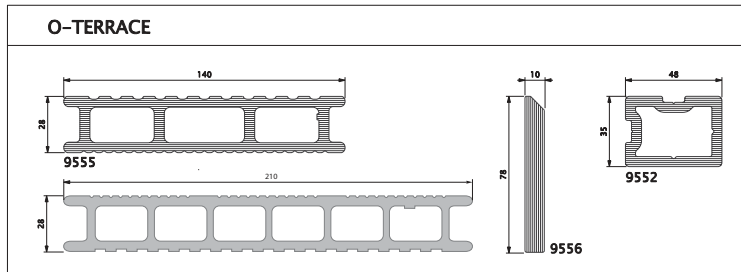

Heering Kunststof Profielen BV
Industrieterrein 'de Rollepaal'
Archimedesstraat 5
NL-7701 SG Dedemsvaart

Postbus 57
NL-7700 AB Dedemsvaart

Tel. 0523 - 615 631
Fax 0523 - 612 668

E-mail info@heering.eu
Internet www.heering.eu

NV223-1/02

3

O-TERRACE


Maintenance and cleaning.
It is always better to remove marks as soon as possible, using water, mild cleaner and a sponge. In most cases, your O-Terrace deck can be cleaned with just high pressure cleaner combined, if necessary, with mild cleaning product. For foodmarks (ketchup, wine, soup, fruit juice, cola, coffee, tea, ...) scrub well with diluted bleach solution, then rinse with large quantity of water.
O-Clean cleaner is appropriate for most of oily marks, butter, silicone and glues.
For more information, please contact your retailer or visit our website www.twinson.net

Onderhoud en reinigbaarheid
Het is raadzaam om vlekken van gelijk welke aard steeds zo snel mogelijk te verwijderen met water, een mild reinigingsproduct en een spons. In de meeste gevallen is je O-Terrace terras al proper met enkel een hogedrukreiniger eventueel in combinatie met een mild reinigingsproduct.
Voor voedselvlekken (ketchup, wijn, soep, fruitsap, cola, koffie, thee, ...) : gebruik een verdunde bleekwater-oplossing, goed schrobben en daarna overvloedig afspoelen met water.
O-Clean reinigingsproduct kan gebruikt worden voor de meeste olie-vlekken, boter, silicone en lijm.
Contacteer je verdeler voor meer informatie of surf naar onze website www.twinson.net



Dilatation P9555

Basic rule: 3mm per linear metre



- CE If a dilatation of at least 3mm/m cannot be guaranteed then you need to subdivide the planks into different modules and/or use the P9543 profile.
- NL Als er geen uitzetting van tenminste 3mm/m kan gegarandeerd worden, dan moet je de planken in verschillende modules opdelen en/of P 9543 gebruiken
- F Si une dilatation d'un minimum de 3mm/m ne peut être garantie, il faudra adapter les dimensions de vos planches et/ou utiliser le profilé P9543
- D Wenn eine Ausdehnung von 3 mm/m nicht gewährleistet werden kann, müssen die Bretter in verschiedene Längen aufgeteilt werden und/oder muss P 9543 verwendet werden.

1. Between the planks
Linear: 10mm

2. Between wall and plank




3. Between plank and plint










Expansion rules: overview

Option 1: end of terrace with P9556

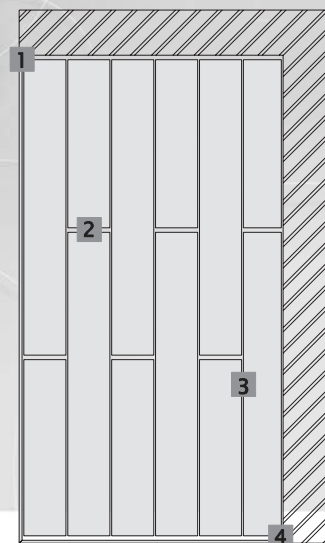

Option 2: end of terrace with P9543

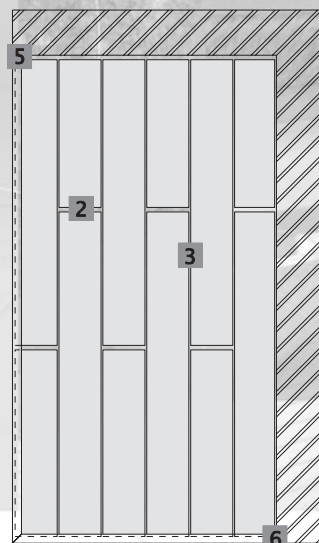

- See spacing rules page 9!
- Zie uitzettingsvoorschriften op pagina 9!
- Voir règles de pose page 9!
- Siehe Abstand Regeln Seite 9!